
# **CROSSINGGARD® GRILLE**

Model ERG-IBC



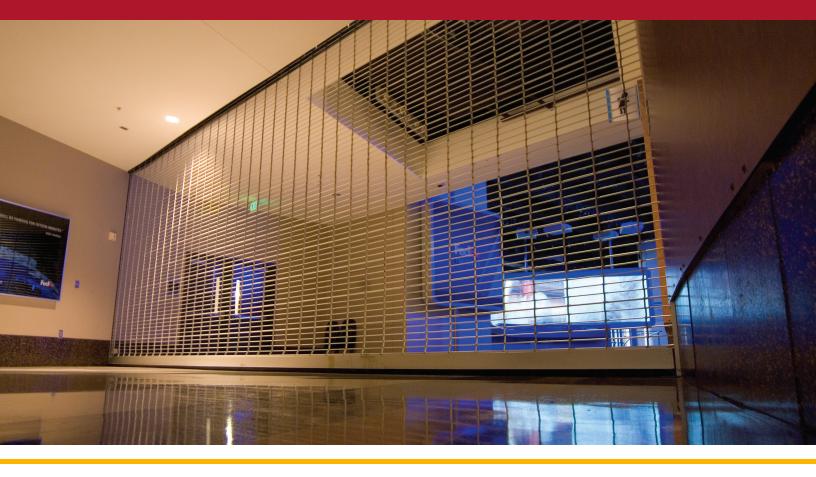

# A FAIL-SAFE, ACCESS-CONTROLLED EGRESS SOLUTION

#### A SECURE EMERGENCY EGRESS SOLUTION

Pursuant to International Building Code® Means of Egress Section 10, CrossingGard® combines secured space separation with emergency egress capability. If notified by alarm, if power fails, or if the emergency exit push-button is activated, the grille immediately executes a fully open position with no electrical requirements whatsoever. Post-event, it can resume a normally closed and secure position with the touch of a button.

#### **LOW-MAINTENANCE DURABILITY**

The rugged, open pattern provides security and visibility with little-to-no maintenance.

## **CONDITIONAL SECURITY PERFORMANCE**


Manual locking or unlocking is not required. When a forced opening is attempted, the Link AutoLock automatically secures any closed grille (while remaining disengaged during normal and emergency operation).

#### A SUPERIOR CHOICE FOR SCHOOLS

The CrossingGard provides excellent corridor protection for flexible space requirements, separation control in facilities where emergency personnel need quick access to secure areas, and containment options for openings requiring a means of egress.



#### STANDARD COMPONENT MATERIALS AND FINISHES

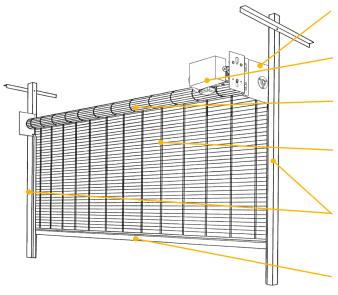

**BRACKETS** - Steel with powder coating in Gray. Bolt to guide assembly and support counter-balance shaft curtain.

**MOTOR** - AlarmGard® FS series motor operator provides fail-safe automatic emergency opening capabilities.

**COUNTER-BALANCE SHAFT** - Steel. Supports curtain and contains torsion springs for assisting operation.

**CURTAIN** - Open curtain pattern with 5/16" solid aluminum rods in mill finish spaced 2" apart and vertical chain links spaced at 9", 6", or 3" on center.

**GUIDES** - Extruded aluminum with mill finish, polypropylene pile runners, snap-on trim and mounting member. Bolt to the wall and support the full weight of the grille.

**BOTTOM BAR** - Heavy-duty, extruded aluminum in mill finish.

# OPERATIONAL AND STRUCTURAL REQUIREMENTS

### Motor operation required.

This product is supported by a guide assembly attached to either wall or overhead construction or structural tubes attached to either wall or overhead construction. No additional header support is required unless hood supports are mandated by a larger opening width.

#### **OPTIONAL MATERIALS AND FINISHES**

- ► Aluminum in Mill, Clear and Color Anodized
- Stainless steel 300 series in #4 finish
- Galvanized steel

### **Brackets, Guides and Bottom Bar**

- ► Hot-dip galvanizing on steel components
- Zinc-enriched, corrosion-resistant powder coating in Gray
- SpectraShield® Powder Coating in more than 180 colors
- ► Hoods available as an option. Galvanized steel with exclusive GalvaNex<sup>™</sup> polyester enamel finish in Gray or SpectraShield® Powder Coating in more than 180 colors; aluminum in Mill, Clear and Dark Bronze Anodized Finish and Black Anodized Finish; or 300 series stainless steel with a #4 finish





#### **CUSTOM-DESIGNED SOLUTIONS**

Contact our experienced Architect Design Support Team for help in customizing our products to fit your specific application.

www.architectdoorhelp.com

