
CROSSINGGARD® GRILLE WITH THREATPROTECT™


Model ERG-TP

MEASURE THE WIDTH AND HEIGHT OF THE OPENING

SERVICE DOOR SIZE AND AREA

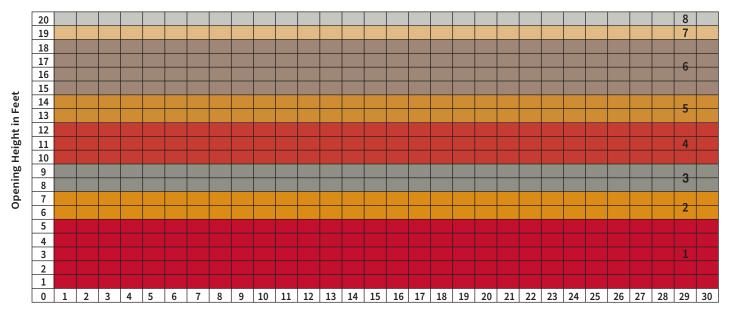

Opening Width in Feet

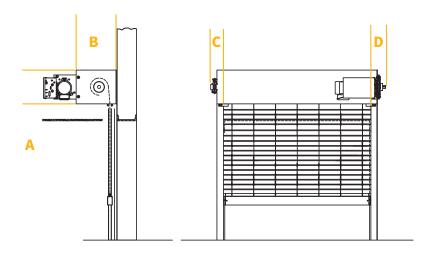

The dimensions featured on this sheet are provided as a guide. Please visit our website at www.cornelliron.com/drawings to generate drawings on demand with exact dimensions.

COMPONENT DIMENSIONS

Dimensions in Inches	8	21	23	9	7
	7	20	22	9	7
	6	19	21	9	6
	5	18	20	9	6
	4	17	19	9	6
	3	16	18	9	6
	2	15	17	9	6
	1	14	16	9	6
	Zone	Α	В	С	D

Reference the zone number to view component dimensions for motorized doors.




EMERGENCY EGRESS GRILLE CROSSINGGARD® WITH THREATPROTECT Model ERG-TP

GUIDE CONSTRUCTION OPTIONS

FACE OF WALL Z

Typically used with masonry wall construction, guides are mounted to the interior or exterior side of the wall.




FACE OF WALL E WITH TUBES

Used when there is 3" uneven or insufficient wall structure, guides are mounted to tubes attached to floor and to 71/4" overhead structure. 21/2" PACKOFF 3/4" to 33/41


FACE OF WALL E

Typically used with steel jambs, guides are mounted to the interior or exterior side of the wall.




BETWEEN JAMBS WITH TUBES 3x3

Typically used if there's no wall support, and tubes and guides need to be recessed within the wall construction.




FACE OF WALL Z WITH TUBES


Used when there is uneven or insufficient wall structure, guides are mounted to tubes attached to floor and overhead structure.




The dimensions featured on this sheet are provided as a guide. Please visit our website at www.cornelliron.com/drawings to generate drawings on demand with exact dimensions.

CURTAIN DESIGNS 2" Rod Spacing











CUSTOM-DESIGNED SOLUTIONS

Contact our experienced Architectural Design Support Team for help in customizing our products to fit your specific application.

