

STORMDEFENDER[®] DOOR

Model PSD361 and Model PRSD361 (fire-rated)




MEASURE THE HEIGHT AND WIDTH OF THE OPENING


COMPONENT DIMENSIONS

3'	19"	19"	9 5/8" to 11"	6 5/8" to 8"	5" to 7"
4'	20"	20"			
5'	21"	21"			
6'	22"	22"			
7'	22"	22"			
8'	23"	23"			
9'	24"	24"			
10'	24"	24"			
11'	25"	25"			
12'	26"	26"			
13'	26"	26"			
14'	28"	28"			
15'	29"	29"			
16'	29"	29"			
Opening Height (feet)	A	B	C (Operator)	D (Adjustor)	E

Maximum width between 13' 10" and 14' depending on configuration. Please contact the factory if maximum width required is more than 13' 10" to ensure proper configuration. Maximum opening width for CMU Mounting is 12'6".

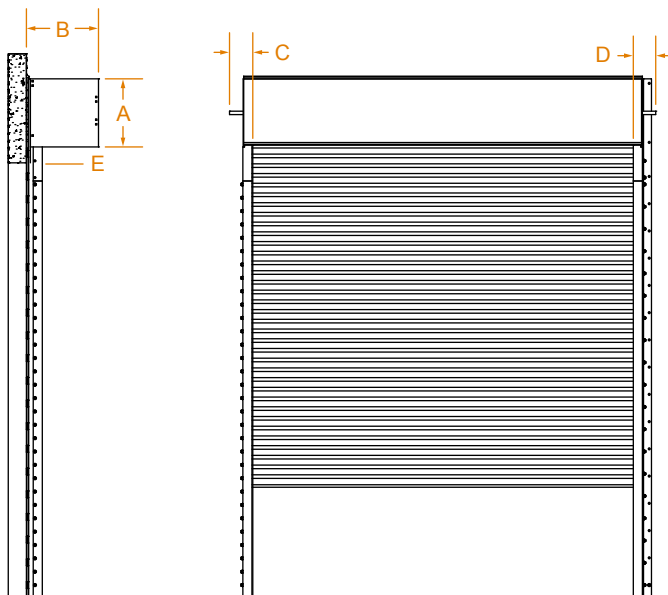

SLAT CROSS-SECTION




The details and dimensions on this sheet are provided as a rough guide for planning purposes. Project specific details and dimensions are available by generating drawings from our website: www.cooksondoor.com/drawings

DEFENDER SERIES **STORMDEFENDER®** DOOR Model PSD361 and Model PRSD361 (fire-rated)

GUIDE CONSTRUCTION OPTIONS


E GUIDE

Typically used with steel jambs

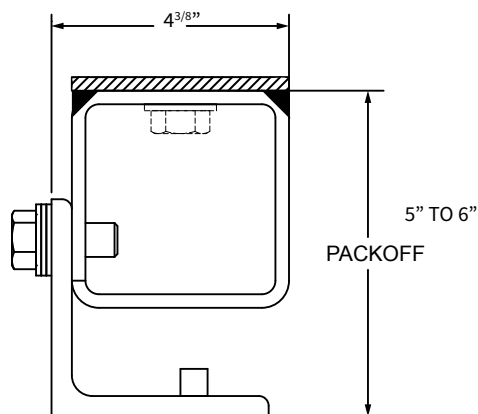


E GUIDE WITH SHIMS

Typically used with for uneven mounting surfaces, i.e. embedment plates

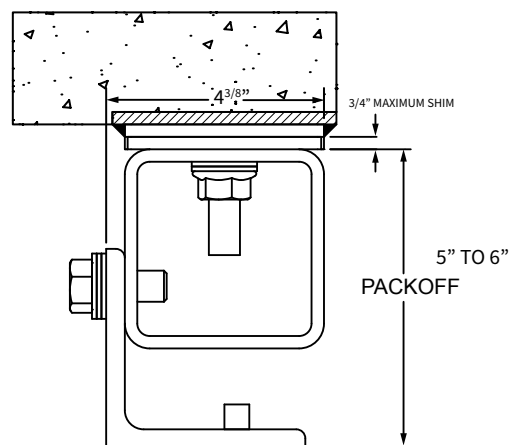


Z GUIDE

Typically used with concrete wall construction

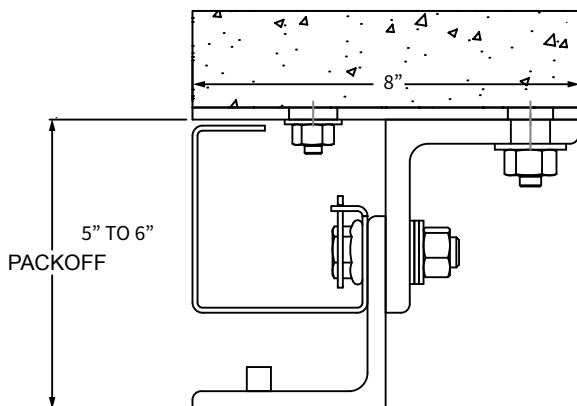

BOTTOM BAR

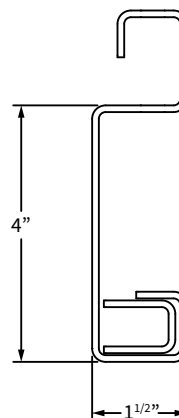

The details and dimensions on this sheet are provided as a rough guide for planning purposes. Project specific details and dimensions are available by generating drawings from our website: www.cooksondoor.com/drawings

CUSTOM-DESIGNED SOLUTIONS

Our experienced Architectural Design Support Team can customize our products to fit your specific application. Call 800.233.8366 ext. 4551 • architecturaldesignsupport@cornellcookson.com