
# VISIONAIRE® MICROCOIL® GRILLE

Models ESG10C & ESG12C

#### MEASURE THE WIDTH AND HEIGHT OF THE OPENING


#### **DOOR SIZE AND AREA**

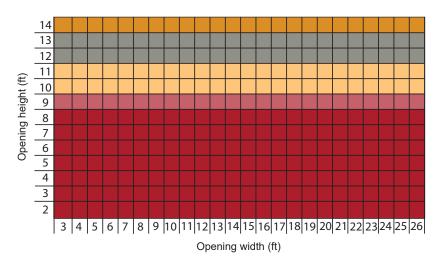


#### **COMPONENT DIMENSIONS**

| Α                                | В                                | C                    | D   | Ε  |
|----------------------------------|----------------------------------|----------------------|---|----|
| 10 <sup>1</sup> / <sub>2</sub> " | 14 <sup>1</sup> / <sub>2</sub> " |                      |   |    |
| 10 <sup>3</sup> / <sub>4</sub> " | 14 ³/₄"                          |                      |   |    |
| 11"                              | 15"                              | FOW = 6'' $BJ = 6''$ | FOW = $6 \frac{1}{2}$ ''<br>BJ = $6 \frac{1}{2}$ '' | 5" |
| 11 1/2"                          | 15 ¹/₄″                          |                      |   |    |
| 11 <sup>3</sup> / <sub>4</sub> " | 15 <sup>3</sup> / <sub>4</sub> " |                      |   |    |

Dimensions provided are for stainless steel and aluminum curtains.

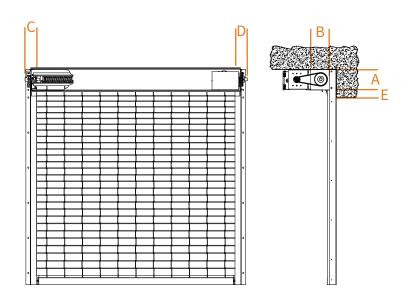

#### **CURTAIN DESIGNS**




The dimensions featured on this sheet are provided as a rough guide for planning purposes. Exact dimensions cannot be provided until field conditions and all options are confirmed. Once field conditions are confirmed, please visit our website at www.cornelliron.com/drawings to generate custom drawings on demand for your specific opening.

### **FACE OF WALL GUIDE CONSTRUCTION OPTIONS**

#### STAINLESS STEEL


#### **Z GUIDE**

Typically used with masonry wall construction, guides are mounted to the interior or exterior side of the wall.





#### **E GUIDE**

Typically used with steel jambs, guides are mounted to the interior or exterior side of the wall.

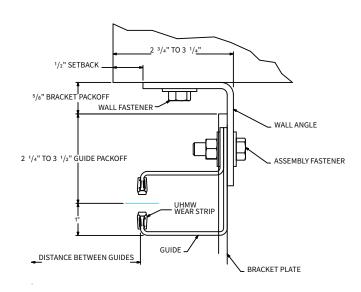

#### **Z GUIDE TO TUBE**

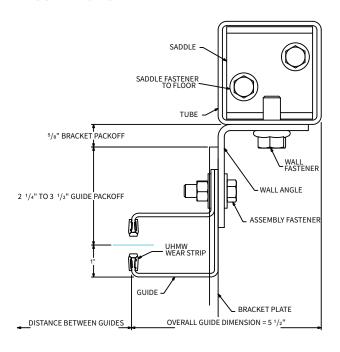

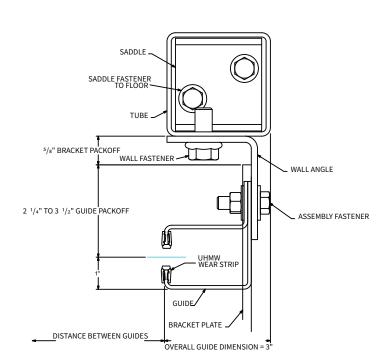




### **FACE OF WALL GUIDE CONSTRUCTION OPTIONS**

#### **Z GUIDE**


Typically used with masonry wall construction, guides are mounted to the interior or exterior side of the wall.

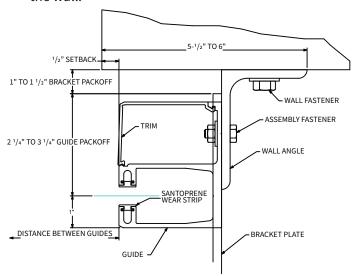


**E GUIDE** 

**ALUMINUM** 


Typically used with steel jambs, guides are mounted to the interior or exterior side of the wall.

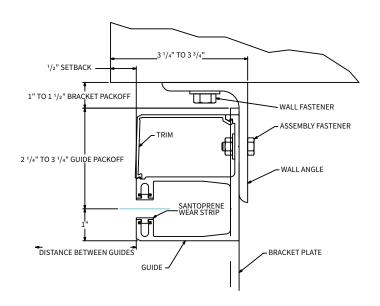

#### **Z GUIDE TO TUBE**

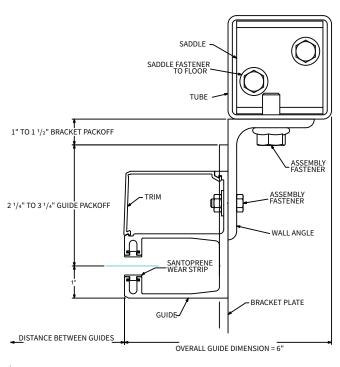

#### **E GUIDE TO TUBE**

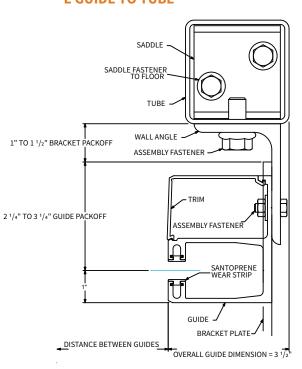




### **BETWEEN JAMBS GUIDE CONSTRUCTION OPTIONS**

## OVERALL GUIDE DIMENSION = 6" 3/4" BRACKET PACKOFF 2 1/4" TO 3 1/4" GUIDE PACKOFF ASSEMBLY FASTENER SADDLE FASTENER TO FLOOR SANTOPRENE WEAR STRIP DISTANCE BETWEEN GUIDES BRACKET PLATE


**ALUMINUM** 

#### STAINLESS STEEL

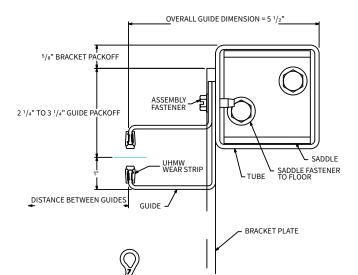


### **BOTTOM BAR CONSTRUCTION**

Compact extruded aluminum in mill finish.







The dimensions featured on this sheet are provided as a rough guide for planning purposes. Exact dimensions cannot be provided until field conditions and all options are confirmed. Once field conditions are confirmed, please visit our website at www.cornelliron.com/drawings to generate custom drawings on demand for your specific opening.

### **CUSTOM-DESIGNED SOLUTIONS**

Our experienced Architectural Design Support Team can customize our products to fit your specific application.

§ 877.537.4567 
☐ arch@cornellcookson.com

