

CORROSION RESISTANT INSULATED DOOR

Model ESD20CR

MEASURE THE WIDTH AND HEIGHT OF THE OPENING

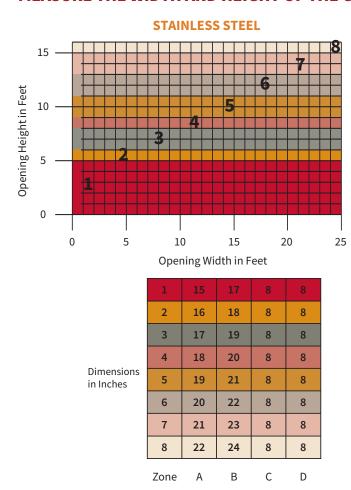

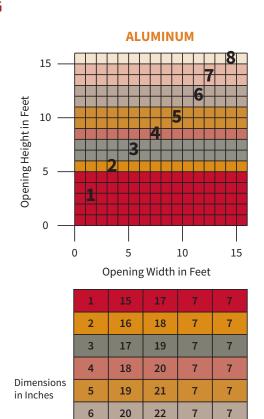

21

22

Α

24


В

7

С

8

Zone

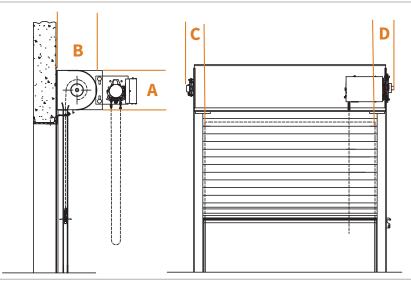

The dimensions featured on this sheet are provided as a guide. Please visit our website at www.cornelliron.com/drawings to generate drawings on demand with exact dimensions.

7


7

D


INSULATED ROLLING DOOR CORROSION RESISTANT INSULATED DOOR Model ESD20CR

GUIDE CONSTRUCTION OPTIONS

E-GUIDE




Z-GUIDE




CURTAIN DESIGN

Insulated Slat



LINTEL SEAL BRUSH



R Value of 8.0

U Value of .125

Calculated using the ASHRAE Handbook of Fundamentals

The dimensions featured on this sheet are provided as a guide. Please visit our website at www.cornelliron.com/drawings to generate drawings on demand with exact dimensions.

CUSTOM-DESIGNED SOLUTIONS

Our experienced Architectural Design Support Team can customize our products to fit your specific application. Call 800.233.8366 ext. 4551 • architecturaldesignsupport@cornellcookson.com

